Westlake US 2 Received 11/21/2023

SNT Satellite Update InSAR Subsidence November 17, 2023

Lonquist comment:

Both the SNT satellite (12-day revisit) and the PAZ satellite from the TSX/PAZ constellation (4 & 7-day revisit) passed by Sulphur on Tuesday November 21. We received the datasets on Thursday and verified that none of the datapoint groups within the review area are showing deviation from their respective trends. The attached reports have been generated for both datasets using new templates that incorporate an expanded set of AOIs covering all Westlake caverns.



SNT Satellite Update

Continuous InSAR Monitoring of Ground Displacement Near Western Caverns and Dome Flank

Sulphur Mines Salt Dome

Prepared for: Westlake Chemical

Prepared by:
Lonquist & Co., LLC
8591 United Plaza Blvd., Suite 280
Baton Rouge, LA 70809

| Dataset | | | | |
|----------------------------|--|--|--|--|
| Satellite Source | | | | |
| Sentinel-1 (SNT) | | | | |
| Most Recent Image Date | | | | |
| Tuesday, November 21, 2023 | | | | |

Analysis Report Date:

November 26, 2023

| Dataset Information | | | | | | |
|-------------------------------|-------------------------------------|--|--|--|--|--|
| Satellite Source | Sentinel-1 (SNT) | | | | | |
| Revisit Frequency | 12 days | | | | | |
| Most Recent Image Date | Tuesday, November 21, 2023 | | | | | |
| Dataset Image Count | 191 | | | | | |
| Dataset Time Range | October 4, 2016 - November 21, 2023 | | | | | |
| Dataset Length | | | | | | |
| Satellite Line-of-Sight (LOS) | | | | | | |

Analysis Methodology

Time Series Charts

Trend lines were calculated for the averaged displacement values within each AOI. Quadratic regression was used to determine Velocity and Acceleration of LOS displacement. Trends calculated for the AOI point groups are depicted for each AOI in the Time Series section of this report.

Contour Maps

A quadratic trend was also calculated for each individual measurement point across the analysis region. Trend values for each point were used to generate Velocity and Acceleration contour maps to depict the spatial distribution of the movement trends. Negative velocity values indicate subsidence or eastward movement. Negative acceleration values indicate increasing rates of subsidence or eastward movement and positive acceleration values indicate slowing rates of subsidence or eastward movement.

Recent vs. Historical Data

The multi-year SNT dataset timeframe allows for Recent data to be evaluated separately from Historical data and for trends from the two timeframes to be compared. The change in the velocities and accelerations from the two timeframes are provided in the Time Series and Contour Map sections. Velocity values are calculated for the final date in either the Recent or Historical datasets.

Observations

To-date there have been <u>no acute deviations</u> from established subsidence trends in the areas investigated.

The comparison of Recent to Historical trends in the SNT data does imply a minor increase in the negative velocity and negative acceleration of LOS displacement in 11 of the 15 AOI point groups. This suggests that marginal increases in subsidence rates may be occuring in these areas in recent years with the greatest increases (in desceding order) occuring in AOI 8 (PPG 22), AOI 1 (LGS 1), AOI 3, and AOI 7 (PPG 7).

In the mapped contours of the change in recent vs. historical subsidence rates, the most notable negative rate change is seen to be occuring in <u>AOI 3</u>, <u>AOI 7</u> (PPG 7), <u>AOI 8</u> (PPG 22), <u>AOI 9</u> (SMS A1), and <u>AOI 10</u> (PPG 2) in both the velocity and acceleration maps. This generally supports the average trend change values presented in the AOI Analysis Summary.



Date Signed: November 27, 2023 Austin, Texas

Nathaniel L. Byars, P.E. Principal Engineer Louisiana License No. 40697

InSAR Data Sources


InSAR Data

Interferometric Synthetic Aperture Radar (InSAR) is the most well established method to continually evaluate small, normally undetectable, ground movement over a large area. Radar imagery collected via satellites over successive orbital passes is used to identify and define measurement points on the ground. Objects or ground features providing a stable reflection of radar energy such as buildings, roads, and infrastructure produce the highest quality measurement points. InSAR analysis identifies the change in distance between the satellite and each measurement point over time relative to a stable reference point within the imaged area.

Satellite Sources


Two InSAR datasets are being used to evaluate subsidence over the Sulphur Mines Salt Dome. These datasets provide Line-of-Sight (LOS) displacment measurements from both ascending and descending orbits. An ascending orbit denotes the satellite's longitudinal course from south to north as it passes over the site, while a desceding orbit denotes the satellite is moving from north to south.

The first dataset comes from a low-resolution Sentinel-1 (SNT) satellite on an ascending orbit that captures data from the west of the site on a 12-day frequency. The second comes from a pair of high resolution satellites that share the same descending orbit and capture data from east of the site. These are a TSX satellite and the PAZ satellite (TSX/PAZ constellation), both with an 11-day revisit frequency. Their orbits are offset with the PAZ satellite passing over the site 4 days after the TSX satellite. Prior to May 2023, data was captured from a different high-resolution TerraSAR-X (TSX) satellite on a descending orbit that captured data from the east of the site on an 11-day frequency. The transition was made for the increased data frequency that resulted from a 4 and 7-day revisit period. The image below depicts the orbital paths of the satellites in relation to the Sulphur Mines Salt Dome.

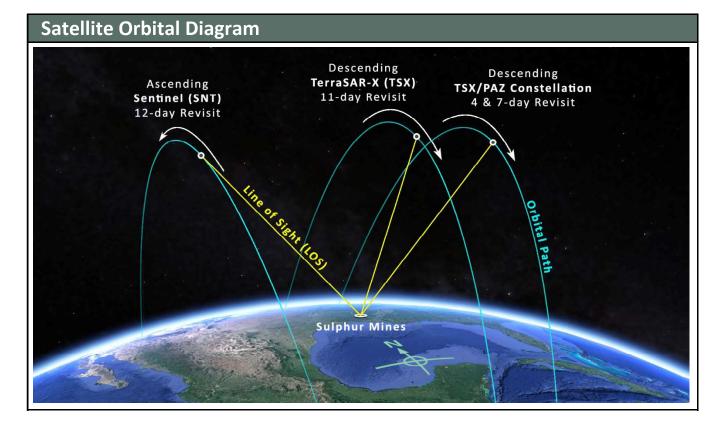


InSAR Line-of-Site (LOS) Data


LOS displacement measurements refer to a change in distance between the satellite sensor and the ground target. Measurement positions on the west side of the Sulphur Dome are are known to be experiencing some eastward movement toward the dome center due to the geometry of the subsidence basin. The InSAR satellites view the site from eastward and westward positions so LOS measurements are understood to convey a movement distance that is not purely vertical. The diagram to the right illustrates the geometric relationship between the theoretical Real movement of a ground target and LOS displacement measurements from two different satellite viewing directions.




Satellite Properties & Image Frequency

| Satellite and Data Properties | SNT | TSX | TSX/PAZ Constellation | | |
|-------------------------------|------------------|------------------|-----------------------|--|--|
| Band (Wavelength) | C-band (2.20 in) | X-band (1.22 in) | X-band (1.22 in) | | |
| Track | T136 | T29 | T67 & T120 | | |
| Pixel resolution | 65 x 16 ft | 3 x 3 ft | 3 x 3 ft | | |
| Revisit frequency | 12 days | 11 days | 4 & 7 days | | |
| Orbit (LOS Angle, $	heta$) | Ascending (43°) | Descending (17º) | Descending (37°) | | |
| Data Start Date | 10/4/2016 | 6/16/2022 | 1/24/2023 | | |
| Measurement error range | ± 0.20 in | ± 0.03 in | ± 0.03 in | | |

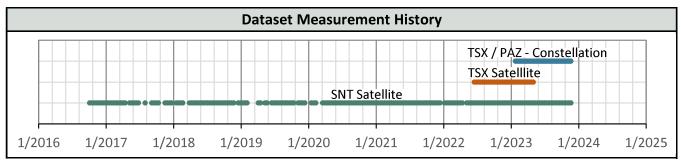

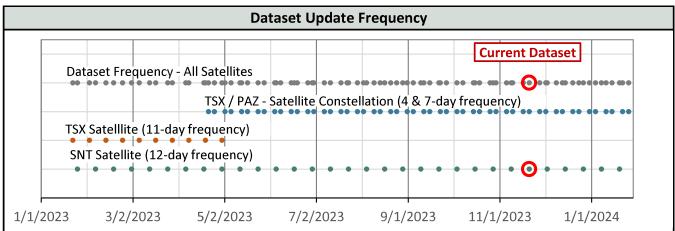


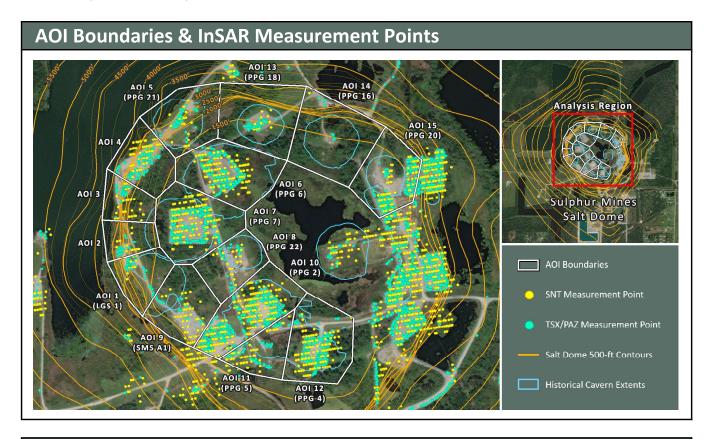



Subsidence Monitoring Areas of Interest (AOIs)


To visually convey and evaluate trend consistency for the displacement time series of each ground target, measurment points were grouped and their displacement values were averaged. The point groups are referred to as Areas of Interest (AOIs) in this analysis and their boundaries are depicted on the above map. The below table lists the trend values calculated in each AOI for the dataset evaluated in this report.


| AOI Name | SNT (11/21/2023) | LOS Velocity (in/yr) | | | LOS Acceleration (in/yr ²) | | |
|------------------------|---------------------|----------------------|--------|--------|--|--------|--------|
| | Point Count | Historical | Recent | Change | Historical | Recent | Change |
| AOI 1 (LGS 1) | 12 | -0.73 | -1.15 | -0.42 | +0.06 | -0.27 | -0.34 |
| AOI 2 | 16 | -0.67 | -1.07 | -0.40 | +0.10 | -0.08 | -0.18 |
| AOI 3 | 29 | -0.66 | -1.00 | -0.34 | +0.03 | -0.28 | -0.31 |
| AOI 4 | 63 | -0.74 | -0.69 | +0.05 | +0.01 | +0.01 | -0.00 |
| AOI 5 (PPG 21) | 24 | -0.66 | -0.50 | +0.16 | +0.02 | +0.11 | +0.09 |
| AOI 6 (PPG 6) | 134 | -0.87 | -0.98 | -0.12 | +0.06 | -0.05 | -0.11 |
| AOI 7 (PPG 7) | 140 | -0.99 | -1.32 | -0.34 | +0.08 | -0.19 | -0.27 |
| AOI 8 (PPG 22) | 21 | -1.06 | -1.56 | -0.50 | +0.13 | -0.28 | -0.41 |
| AOI 9 (SMS A1) | 58 | -0.83 | -1.03 | -0.21 | +0.10 | -0.11 | -0.21 |
| AOI 10 (PPG 2) | 232 | -0.90 | -1.14 | -0.23 | +0.11 | -0.08 | -0.19 |
| AOI 11 (PPG 5) | 48 | -0.85 | -1.07 | -0.22 | +0.09 | -0.11 | -0.20 |
| AOI 12 (PPG 4) | 121 | -0.71 | -0.84 | -0.13 | +0.07 | +0.03 | -0.04 |
| AOI 13 (PPG 18) | 12 | -0.65 | -0.67 | -0.03 | +0.03 | -0.00 | -0.03 |
| AOI 14 (PPG 16) | 1 | -0.33 | -0.25 | +0.08 | +0.04 | +0.04 | -0.00 |
| AOI 15 (PPG 20) | 70 | -0.30 | -0.39 | -0.09 | +0.06 | -0.03 | -0.08 |

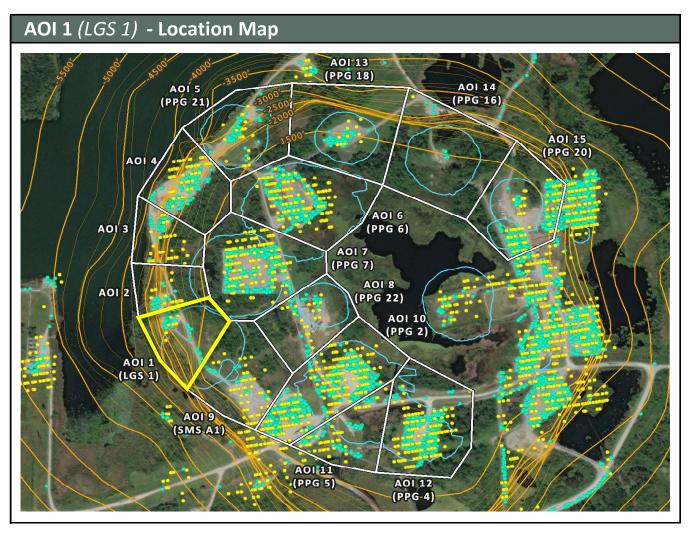


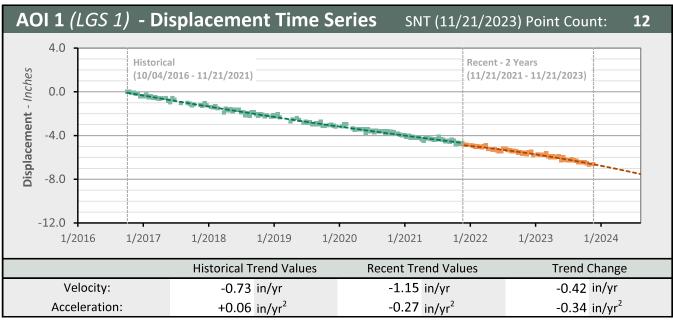


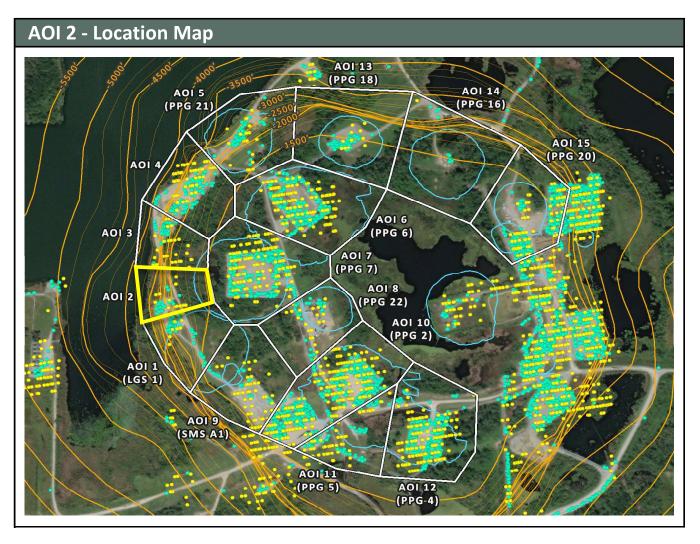


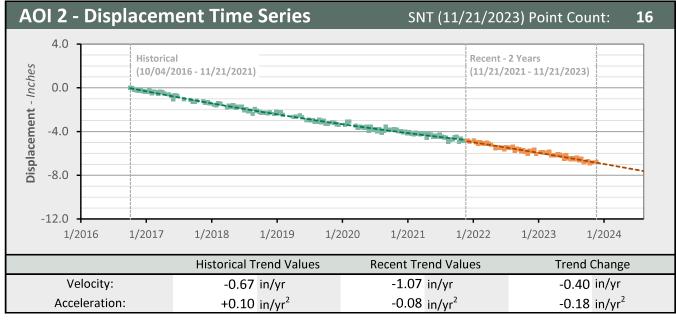


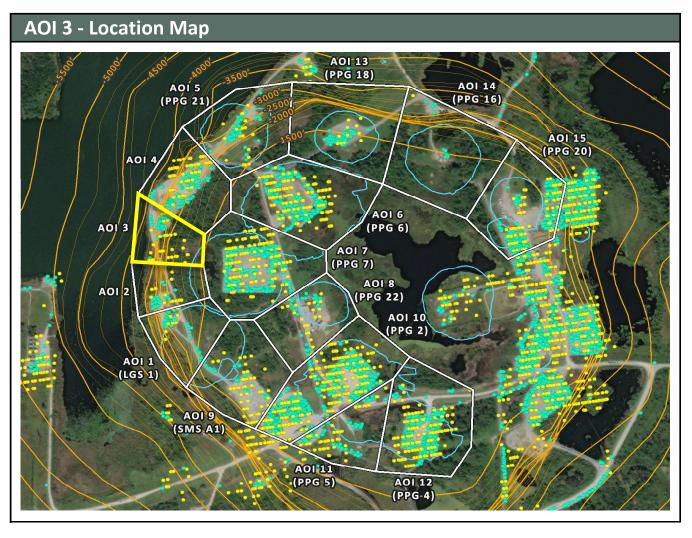


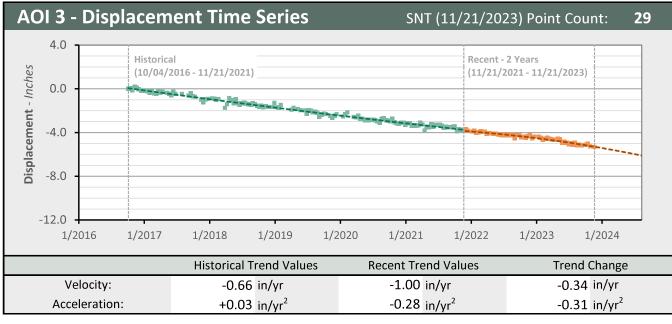


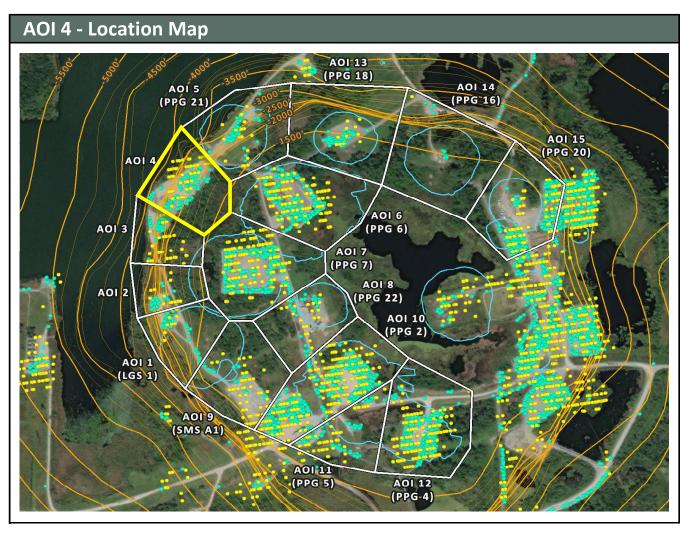


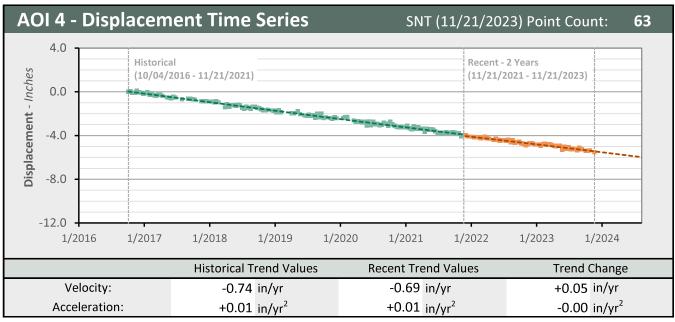


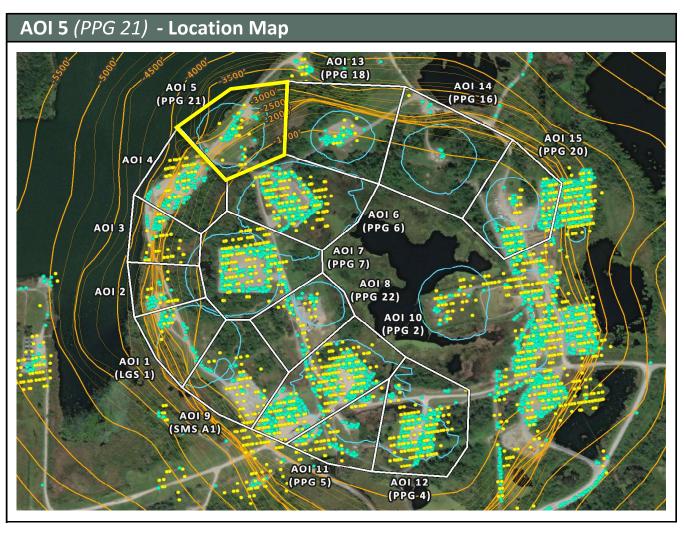


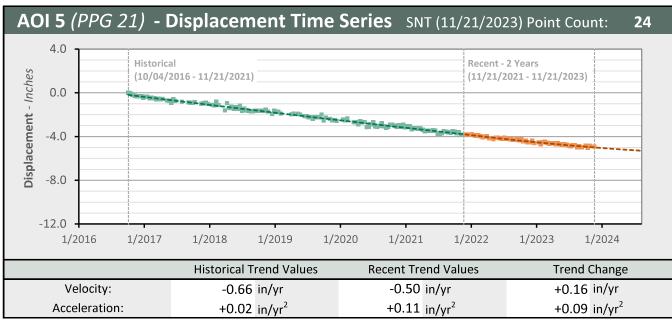

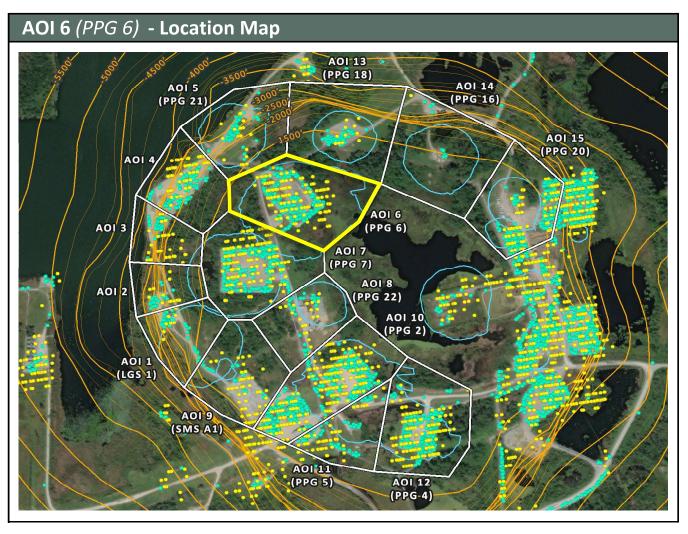

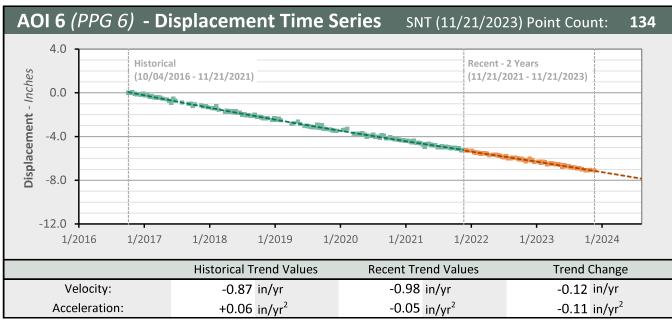

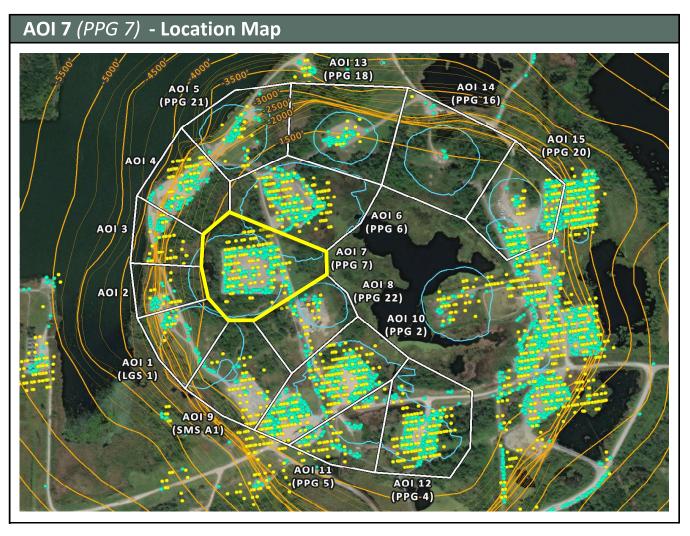

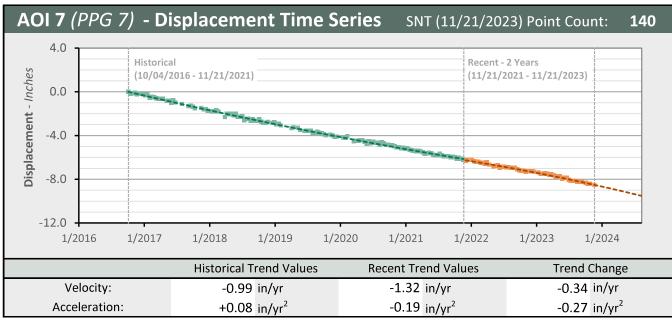

| Historical LOS Displacement Measurement | Historical Trend Line (Quadratic Regression) | Recent LOS Displacement Measurement | Historical Trend Line (Quadratic Regression) |
|---|---|--|---|
| | | | |

