Westlake US 2 Received 6/20/2024

TSX/PAZ Satellite Update InSAR Subsidence June 17, 2024

<u>Lonquist comment:</u>

The PAZ satellite from the TSX/PAZ constellation passed by Sulphur on Monday June 17. We received the dataset yesterday and observed that a negative departure from trend has been recorded in the AOIs on the western and southwestern portions of the dome. The most significant deviation was observed in AOI 1 with a displacement value that is roughly -0.35 inches below trend for the averaged measurement point data within the AOI.

Temporary departures from trend have been observed in the past that are ultimately attributed to measurement error from atmospheric noise. We will need to await the delivery of a few more datasets to improve confidence and accurately quantify the magnitude of trend departure if it continues. TREA has been notified of these observations, and has responded that they are currently investigating the data over these areas.

The recently installed tiltmeter and GNSS arrays are fully functional and are in the early stages of data collection. The system is still in the initial stages of settling and the determination of background deformation signals in the monitoring area. A preliminary review of the data collection from June 1-30 will be provided in a monthly report. The observations from this system will help to verify the accuracy of the displacement trends identified in the InSAR analyses as additional data is collected.

Submitted by: Nathaniel Byars (Longuist)

TSX/PAZ Satellite Update

Continuous InSAR Monitoring of Ground Displacement At Westlake Caverns and Western Dome Flank

Sulphur Mines Salt Dome

Prepared for:

Westlake Chemical

Prepared by:
Lonquist & Co., LLC
8591 United Plaza Blvd.
Suite 280
Baton Rouge, LA 70809

Dataset

Satellite Source

TerraSAR-X - PAZ Constellation

Most Recent Image Date

Monday, June 17, 2024

Analysis Report Date:

June 20, 2024

Dataset Information					
Satellite Source	TerraSAR-X - PAZ Constellation				
Revisit Frequency	4 and 7 days				
Most Recent Image Date	Monday, June 17, 2024				
Dataset Image Count	91				
Dataset Time Range	January 24, 2023 - June 17, 2024				
Dataset Length	1.40 Years				
Satellite Line-of-Sight (LOS)	37° East of Vertical (Viewing site from the East)				

Analysis Methodology

Time Series Charts

Trend lines were calculated for the averaged displacement values within each AOI. Both a nonlinear (quadratic) and linear regression were applied to each AOI point group to identify rates of change in LOS displacement. These trends are displayed in the Time Series section of this report.

Contour Maps

A nonlinear (quadratic) and linear trend was also calculated for each individual measurement point across the analysis region. Nonlinear trend values for each point were used to generate Velocity and Acceleration contour maps to convey the spatial distribution of the calculated movement. The linear trend values for each point (which lack an acceleration component) were used to generate an additional Velocity contour map. Negative velocity values indicate subsidence or westward movement and positive velocity indicates uplift or eastward movement. Negative acceleration values indicate increasing rates of subsidence, increasing westward movement, or slowing eastward movement and positive acceleration values indicate slowing rates of subsidence, slowing westward movement, or increasing eastward movement.

Observations

A negative trend deviation has been observed in the majority of the AOIs beginning with the most recent dataset (6-17-2024). The most significant deviation was observed in $\underline{AOI\ 1}$ which shows a displacement of roughly -0.35 inches below the nonlinear trend line for the averaged measurement point readings within the AOI.

Temporary departures from trend have been observed throughout the data timeframe due to external atmospheric influences that may affect measurement accuracy. Subsequent datasets will help to improve confidence and verify the magnitude of trend departure if these changes persist.

Recent data has begun to indicate a negative acceleration of varying magnitudes across most of the AOI point groups evaluated. Seasonal effects are believed to contribute to fluctuations above and below the trend lines for each AOI and may play a siginficant role in the more gradual changes that have been observed.



Date Signed: June 20, 2024 Austin, Texas

Nathaniel L. Byars, P.E. Principal Engineer Louisiana License No. 40697

InSAR Data Sources


InSAR Data

Interferometric Synthetic Aperture Radar (InSAR) is the most well established method to continually evaluate small, normally undetectable, ground movement over a large area. Radar imagery collected via satellites over successive orbital passes is used to identify and define measurement points on the ground. Objects or ground features providing a stable reflection of radar energy such as buildings, roads, and infrastructure produce the highest quality measurement points. InSAR analysis identifies the change in distance between the satellite and each measurement point over time relative to a stable reference point within the imaged area.

Satellite Sources


Two InSAR datasets are being used to evaluate subsidence over the Sulphur Mines Salt Dome. These datasets provide Line-of-Sight (LOS) displacment measurements from both ascending and descending orbits. An ascending orbit denotes the satellite's longitudinal course from south to north as it passes over the site, while a desceding orbit denotes the satellite is moving from north to south.

The first dataset comes from a low-resolution Sentinel-1 (SNT) satellite on an ascending orbit that captures data from the west of the site on a 12-day frequency. The second comes from a pair of high resolution satellites that share the same descending orbit and capture data from east of the site. These are a TSX satellite and the PAZ satellite (TSX/PAZ constellation), both with an 11-day revisit frequency. Their orbits are offset with the PAZ satellite passing over the site 4 days after the TSX satellite. Prior to May 2023, data was captured from a different high-resolution TerraSAR-X (TSX) satellite on a descending orbit that captured data from the east of the site on an 11-day frequency. The transition was made for the increased data frequency that resulted from a 4 and 7-day revisit period. The image below depicts the orbital paths of the satellites in relation to the Sulphur Mines Salt Dome.

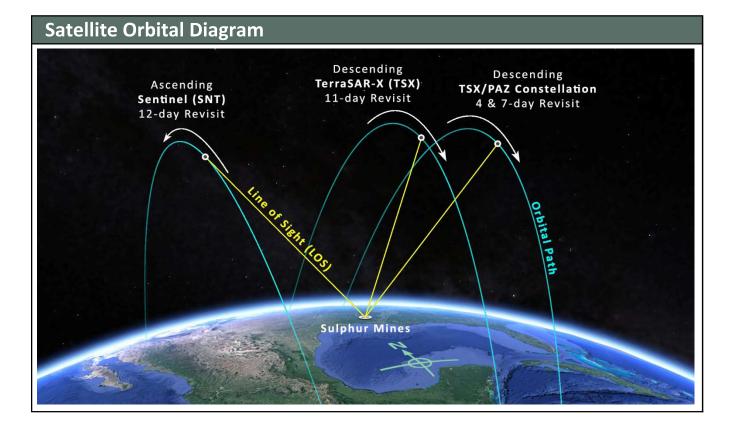


InSAR Line-of-Site (LOS) Data


LOS displacement measurements refer to a change in distance between the satellite sensor and the ground target. Measurement positions on the west side of the Sulphur Dome are are known to be experiencing some eastward movement toward the dome center due to the geometry of the subsidence basin. The InSAR satellites view the site from eastward and westward positions so LOS measurements are understood to convey a movement distance that is not purely vertical. The diagram to the right illustrates the geometric relationship between the theoretical Real movement of a ground target and LOS displacement measurements from two different satellite viewing directions.

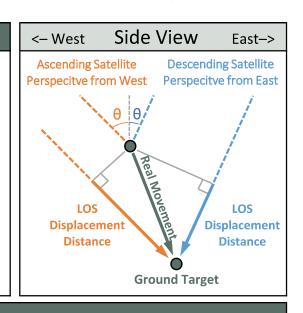


Satellite Properties & Image Frequency

Satellite and Data Properties	SNT	TSX	TSX/PAZ Constellation	
Band (Wavelength)	C-band (2.20 in)	X-band (1.22 in)	X-band (1.22 in)	
Track	T136	T29	T67 & T120	
Pixel resolution	65 x 16 ft	3 x 3 ft	3 x 3 ft	
Revisit frequency	12 days	11 days	4 & 7 days	
Orbit (LOS Angle, $ heta$)	Ascending (43°)	Descending (17º)	Descending (37°)	
Data Start Date	10/4/2016	6/16/2022	1/24/2023	
Measurement error range	± 0.20 in	± 0.03 in	± 0.03 in	

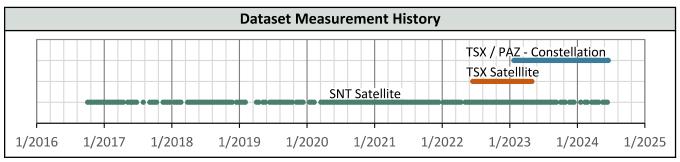

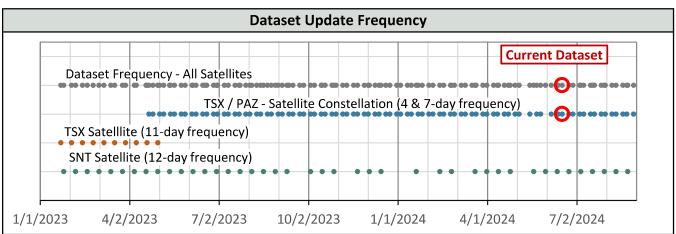


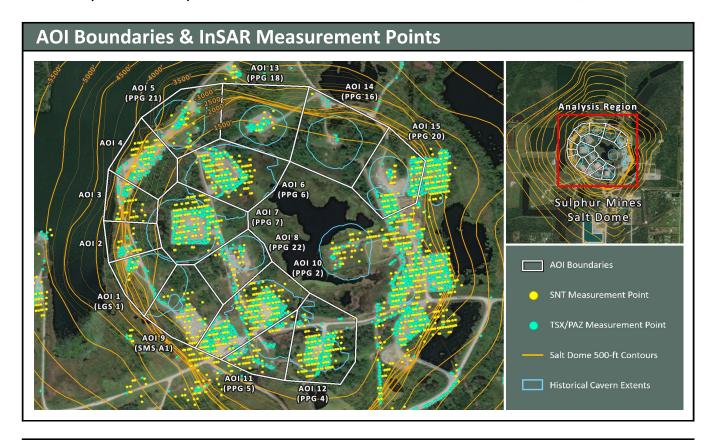



Subsidence Monitoring Areas of Interest (AOIs)


To visually convey and evaluate trend consistency for the displacement time series of each ground target, measurment points were grouped and their displacement values were averaged. The point groups are referred to as Areas of Interest (AOIs) in this analysis and their boundaries are depicted on the above map. The below table lists the trend values calculated in each AOI for the dataset evaluated in this report.


AOI Name	TSX/PAZ (6/17/2024)	LOS Velocity (in/yr)		LOS Acceleration (in/yr²)	
	Point Count	Nonlinear	Linear	Nonlinear	Linear
AOI 1 (LGS 1)	42	-0.28	-0.03	-0.35	0.00
AOI 2	24	-0.27	-0.01	-0.37	0.00
AOI 3	39	-0.49	-0.02	-0.67	0.00
AOI 4	103	-0.25	+0.04	-0.41	0.00
AOI 5 (PPG 21)	47	-0.31	-0.18	-0.19	0.00
AOI 6 (PPG 6)	212	-0.51	-0.39	-0.17	0.00
AOI 7 (PPG 7)	216	-0.45	-0.26	-0.27	0.00
AOI 8 (PPG 22)	36	-0.53	-0.55	+0.02	0.00
AOI 9 (SMS A1)	23	-0.02	-0.22	+0.29	0.00
AOI 10 (PPG 2)	404	-0.63	-0.53	-0.14	0.00
AOI 11 (PPG 5)	85	-0.40	-0.42	+0.03	0.00
AOI 12 (PPG 4)	262	-0.75	-0.78	+0.05	0.00
AOI 13 (PPG 18)	52	-0.49	-0.41	-0.12	0.00
AOI 14 (PPG 16)	11	-0.21	-0.62	+0.58	0.00
AOI 15 (PPG 20)	229	-0.82	-0.92	+0.14	0.00

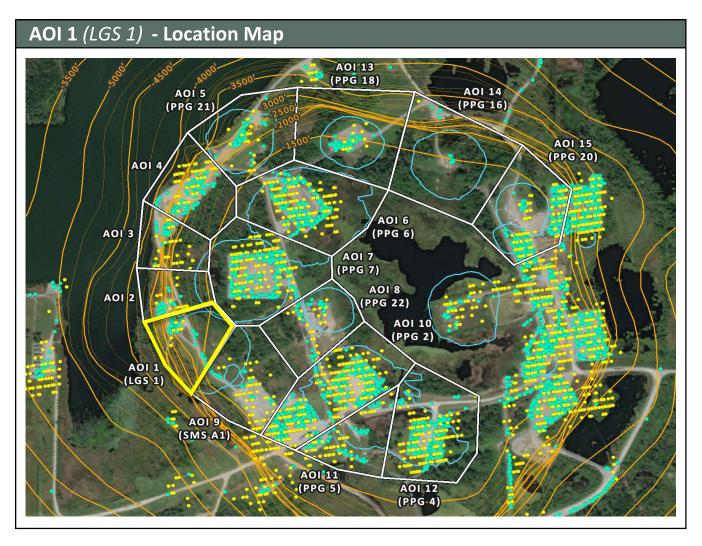


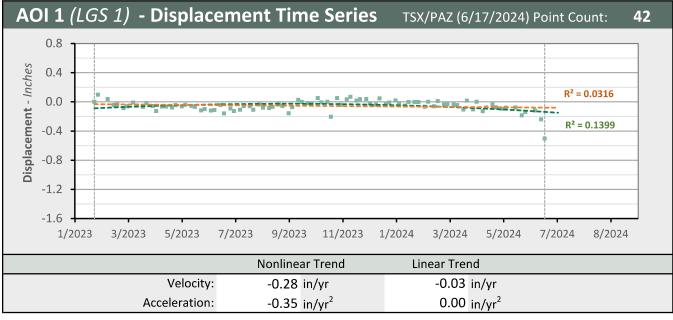


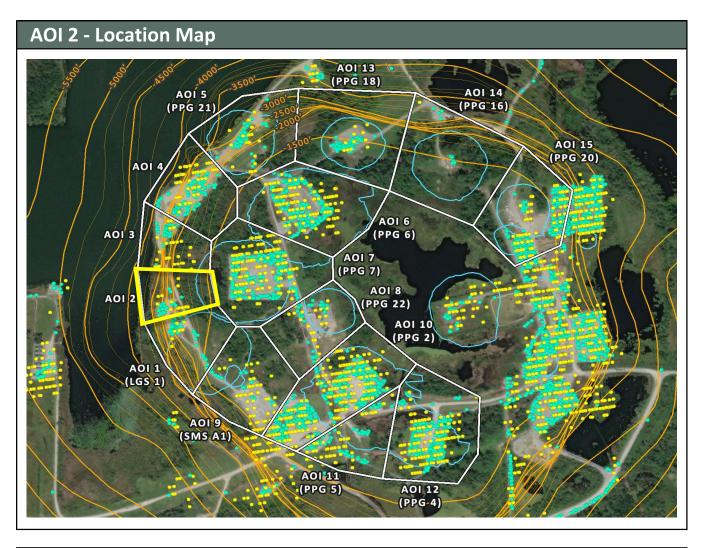


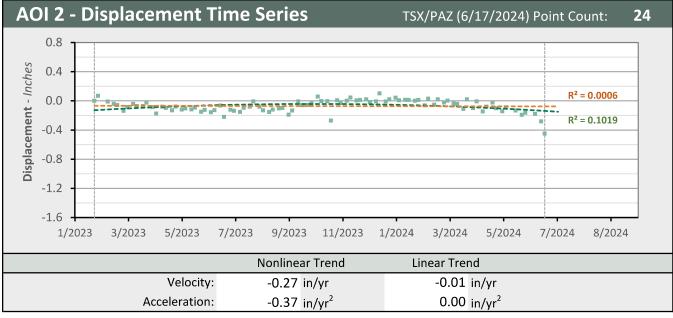

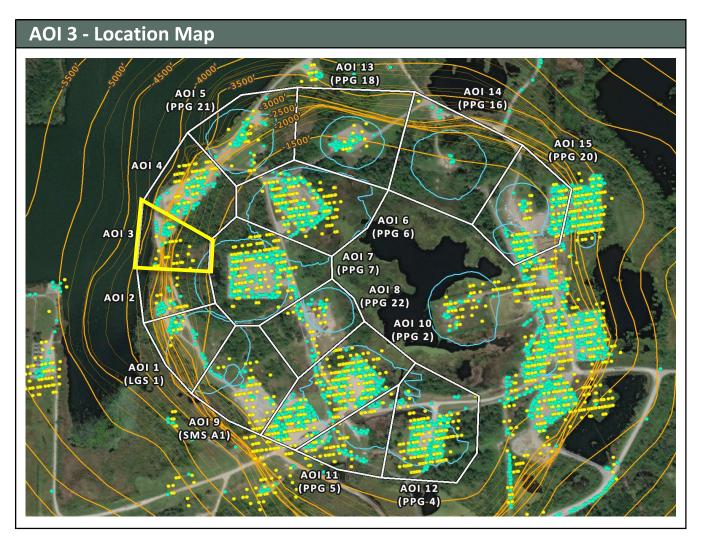


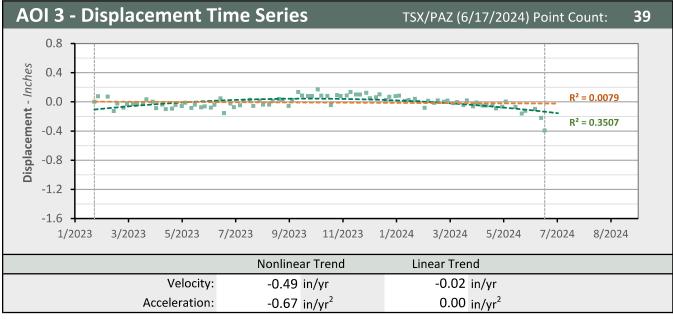


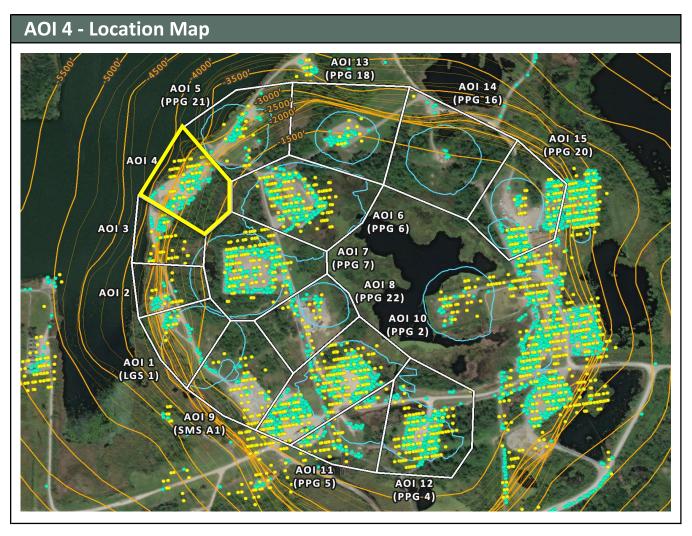


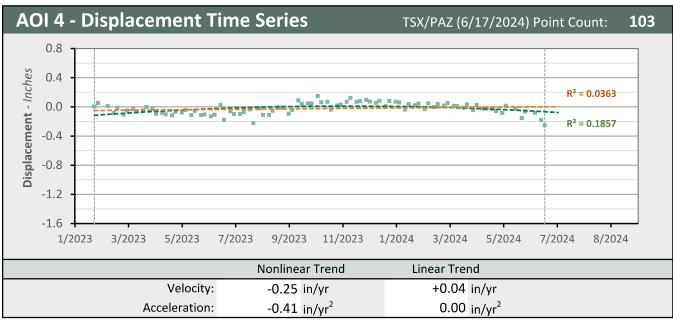





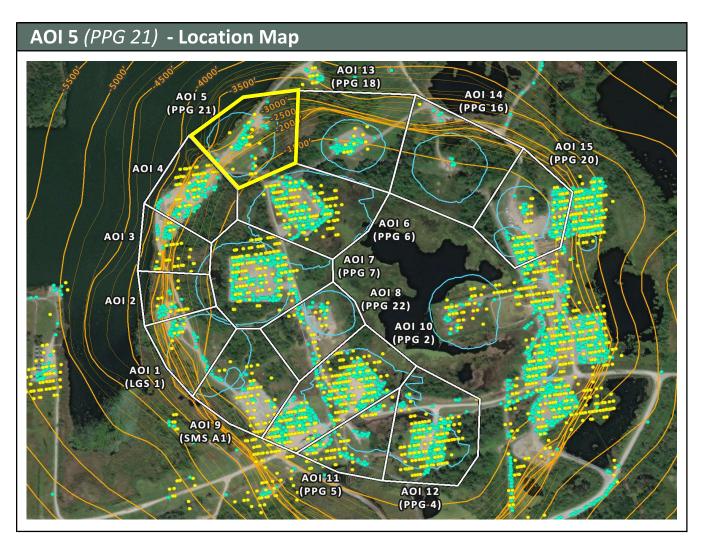


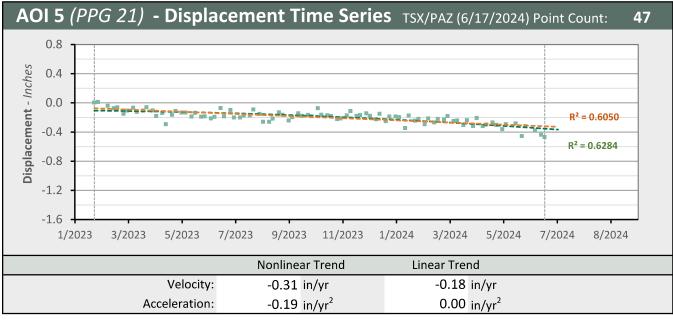


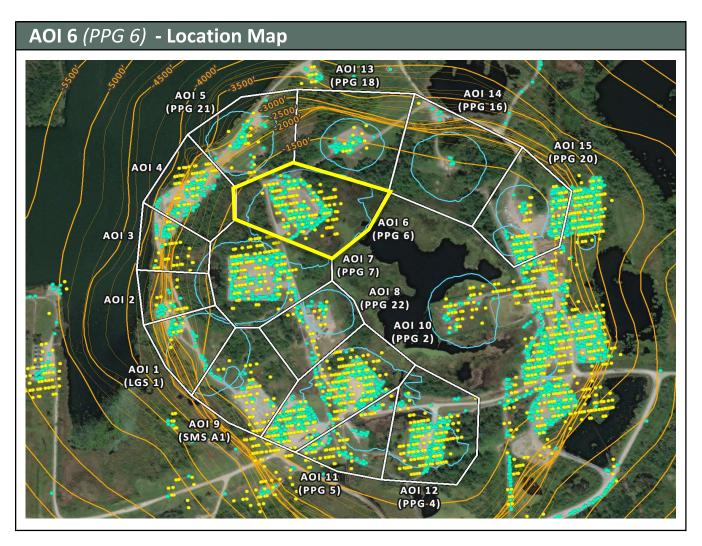


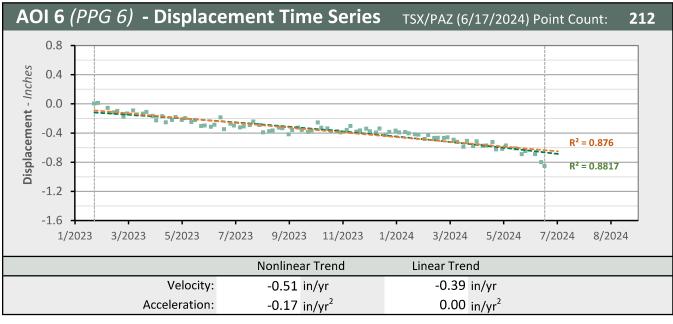


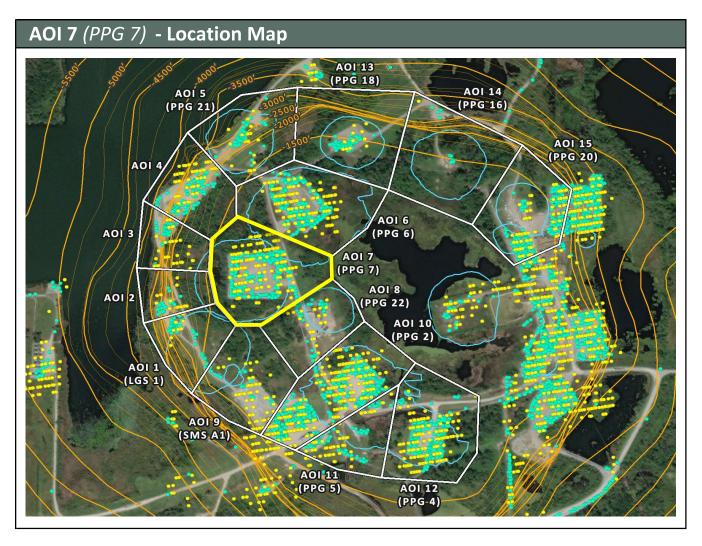


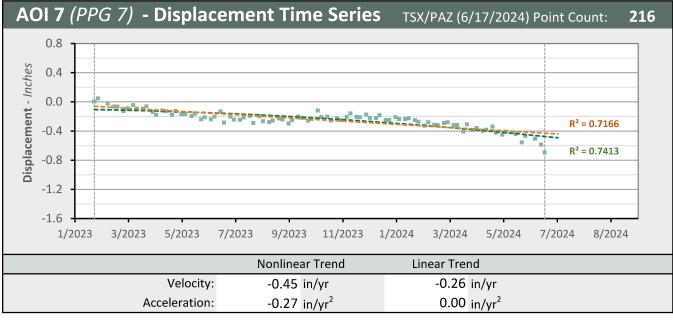


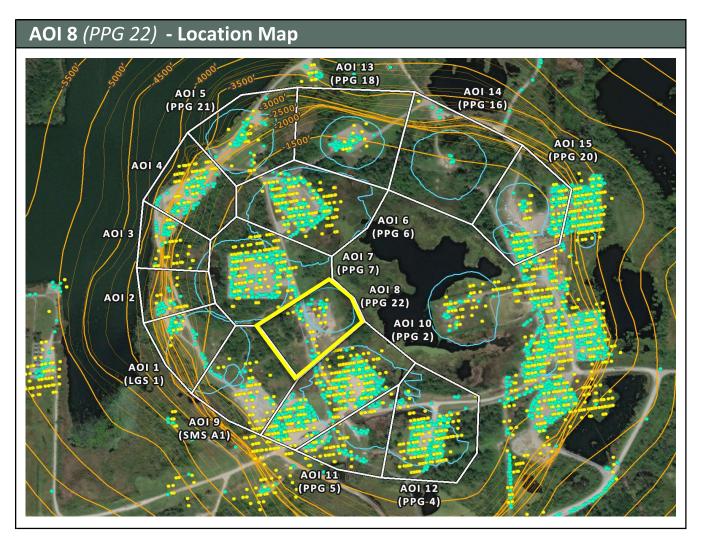


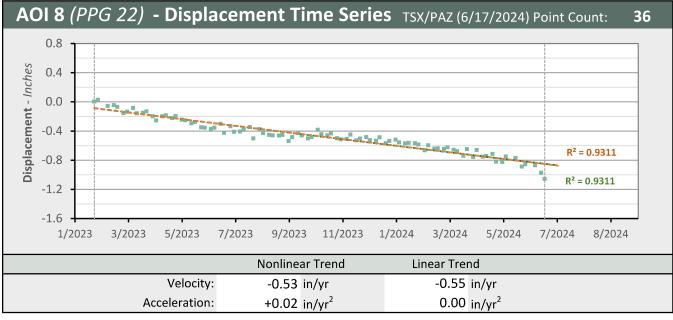


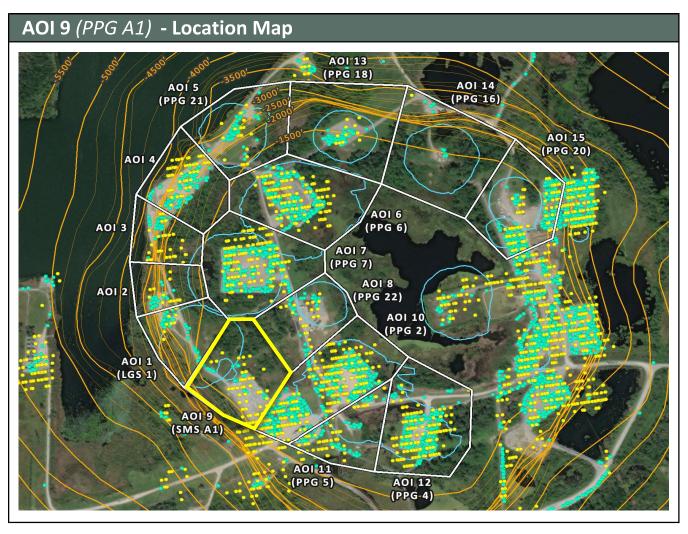


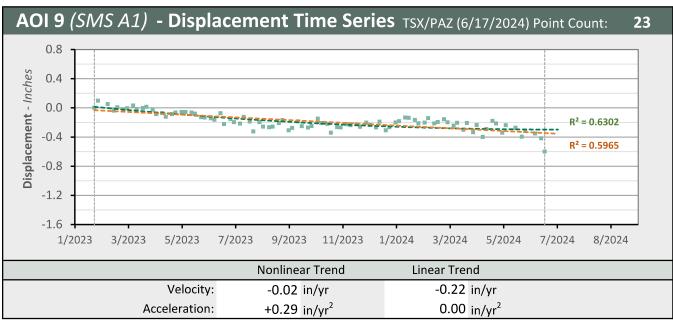

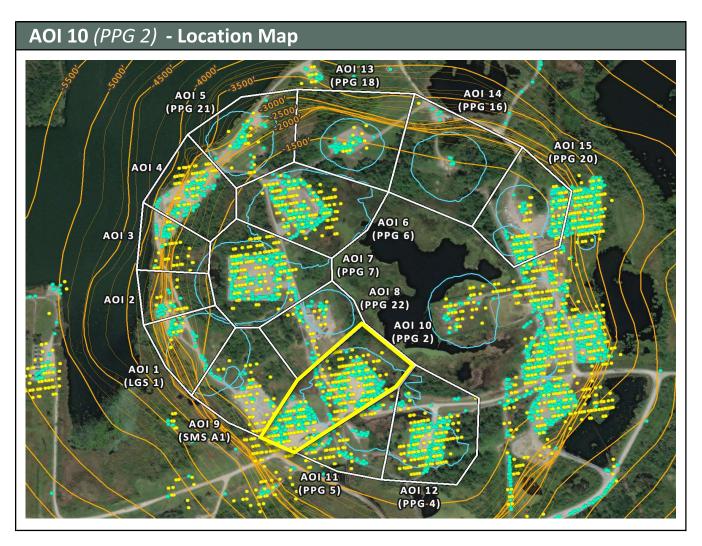


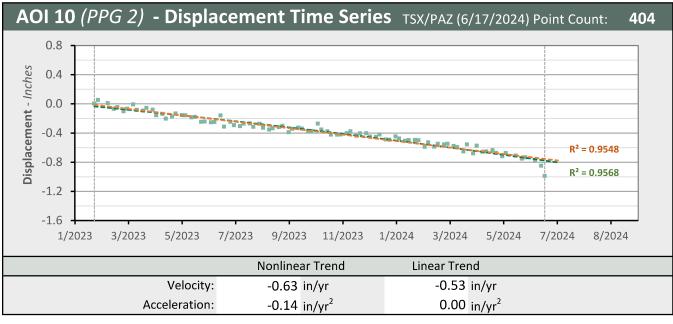


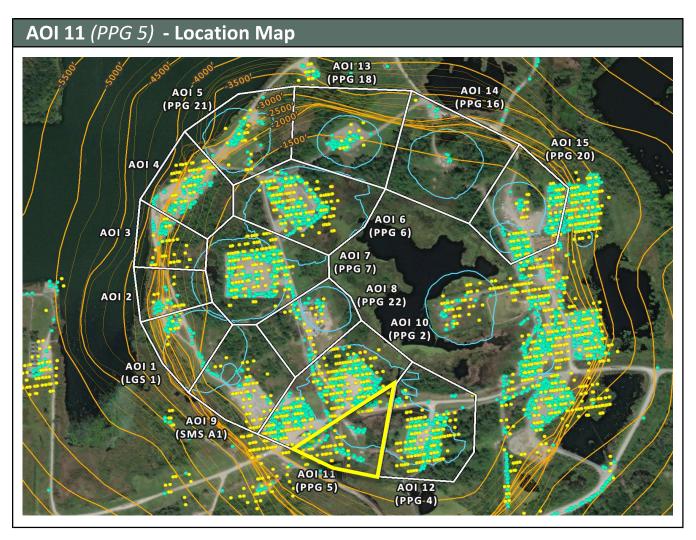


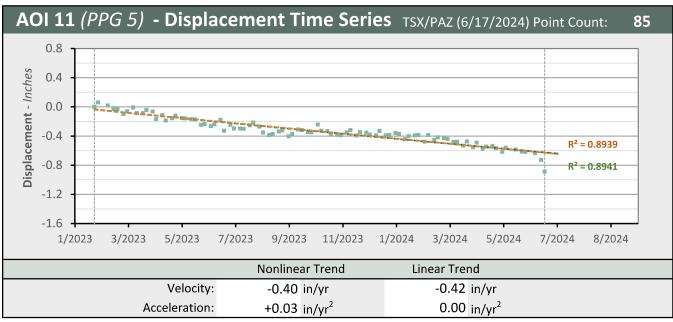




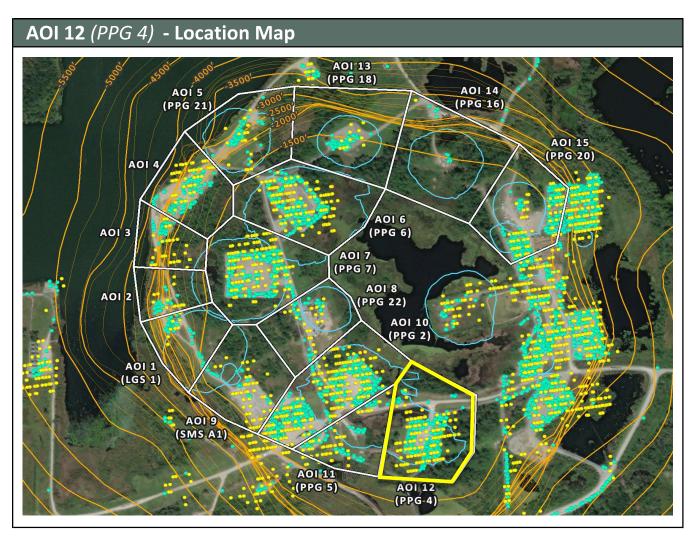

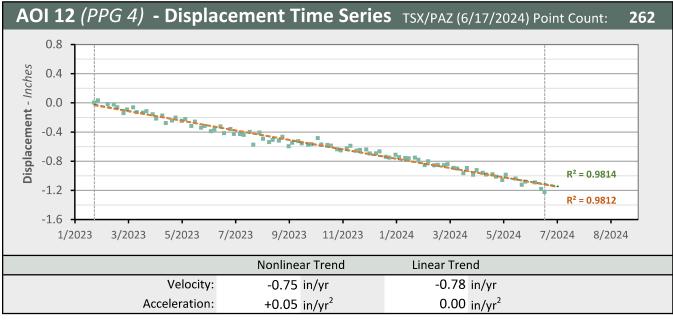

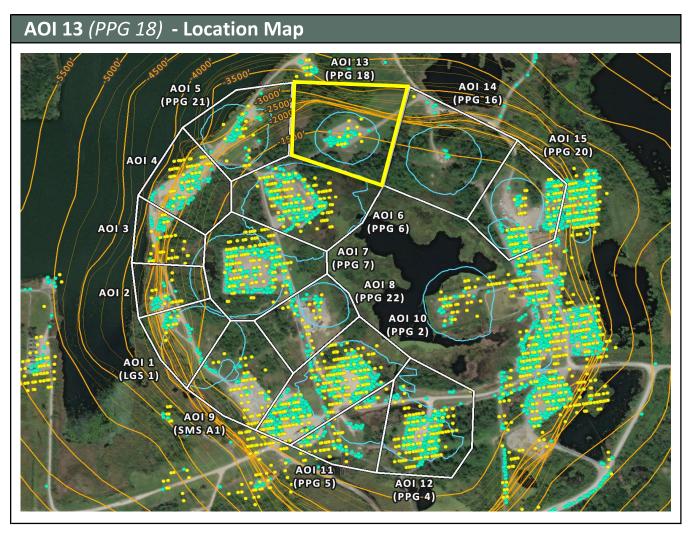

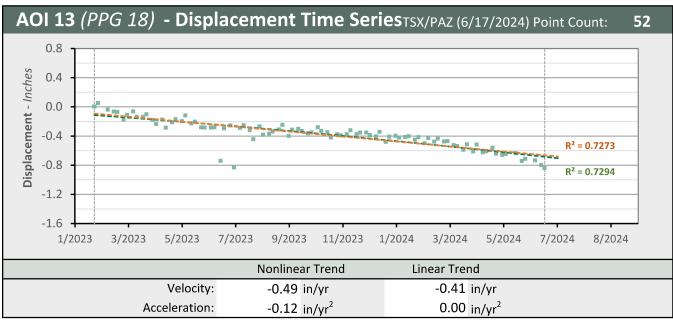

■ LOS Displacement Measurement ——— Nonlinear Trend Line (Quadratic Regression) ——— Linear Trend Line (Linear Regression)

